
| SHUR |

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

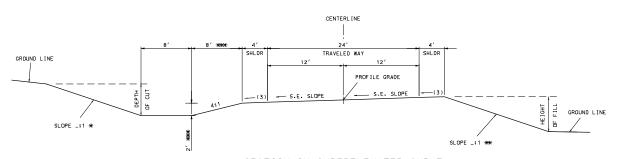

DEPTH OF CUT

SLOPE \_:1 \*

SECTION ON SUPERELEVATED CURVE TYPICAL SECTION RTE. XX STA. XXX.XX TO STA. XXX.XX

SECTION ON TANGENT TYPICAL SECTION RTE. XX STA. XXX.XX TO STA. XXX.XX

- \* BACKSLOPE DETERMINED BY SOIL SURVEY.
- \*\*\* THE FILL SLOPE SHALL BE 4:1 DR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET I.THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER Y
  FOINT IS A MINIMUM OF 8 FEET). THE SLOPE MAY VARY
  THE FEET SHOULDER Y
  THE SET SHOULD SLOPE SHALL DE HEIGHT GREATER
  MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- \*\*\*\* 4' DITCH DEPTH PREFERRED IF ALTERNATE 2' ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 16' FOR 4' DITCH DEPTH.

D-67F	
FUNCTION	COLLECTOR & LOCAL
ADT	400 - 1700
TRAVELED WAY WIDTH	24'
ROADBED WIDTH	32'
FORESLOPE	4:1
DITCH	2'

GROUND LINE

SLOPE \_:1 \*\*

