


SECTION ON TANGENT
TYPICAL SECTION RTE. XX
STA. XXX.XX TO STA. XXX.XX

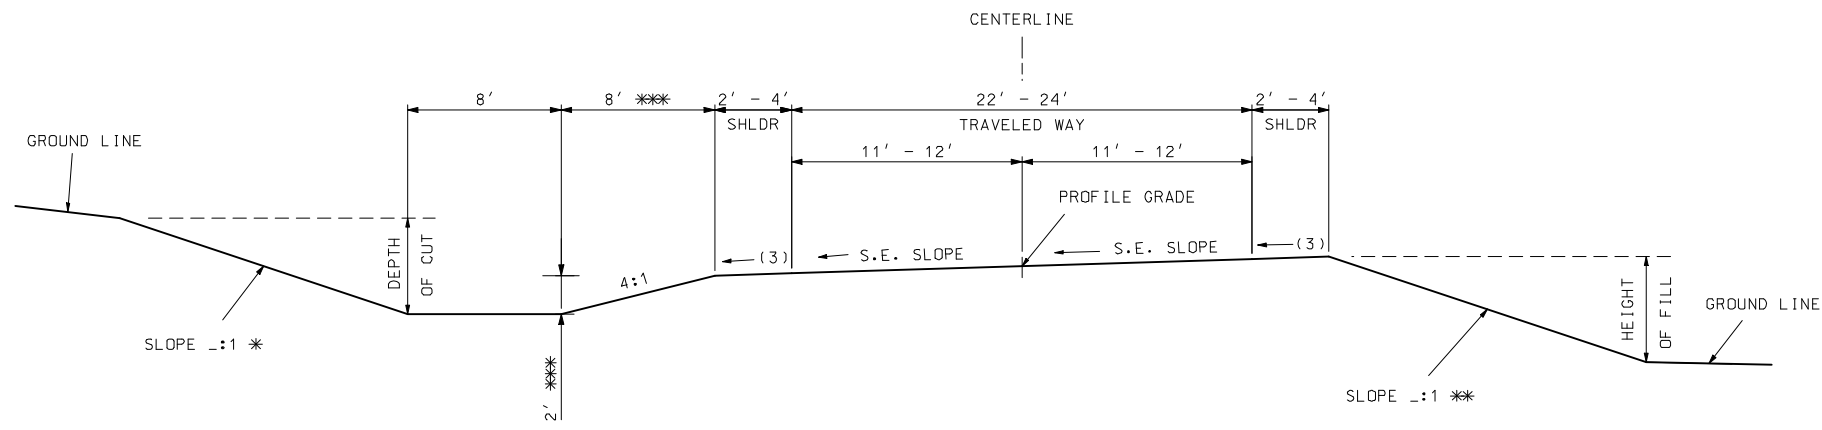

SECTION ON SUPERELEVATED CURVE
TYPICAL SECTION RTE. XX
STA. XXX.XX TO STA. XXX.XX

CROSS SLOPE
(1) 2.0%
(2) 4.0%
(3) S.E. SLOPE IF GREATER THAN 4.0%

SEE STANDARDS 203.20, 606.00 AND 609.40 FOR SHOULDER WIDENING.

- * BACKSLOPE DETERMINED BY SOIL SURVEY.
- ** THE FILL SLOPE SHALL BE 4:1 OR FLATTER WHEN THE FILL HEIGHT IS EQUAL TO OR LESS THAN 2 FEET (I.E., THE OFFSET FROM THE TOE OF FILL TO THE SHOULDER POINT IS A MINIMUM OF 8 FEET). THE SLOPE MAY VARY TO MEET THIS REQUIREMENT. FOR FILL HEIGHTS GREATER THAN 2 FEET, THE SLOPE SHALL NOT EXCEED THE MAXIMUM SLOPE DETERMINED BY THE SOIL SURVEY.
- *** 4' DITCH DEPTH PREFERRED IF ALTERNATE 18" ROCK BASE IS USED. SIDESLOPE WIDTH SHALL BE 16' FOR 4' DITCH DEPTH.

D-67G	
FUNCTION	LOCAL ROADWAY
ADT	>400
TRAVELED WAY WIDTH	22' - 24'
ROADBED WIDTH	26' - 32'
FORESLOPE	4:1
DITCH	2'

DATE PREPARED 09/29/2008	
ROUTE	STATE MO
DISTRICT	SHEET NO.
COUNTY	
JOB NO.	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	
DESCRIPTION	
DATE	
MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION	
105 WEST CAPITOL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)	